

EE 3806205745

THE ASSISTANT COMMISSIONER OF PATENTS  
Washington, D.C. 20231

DOCKET NUMBER: AT9-98-341

Date: 12-16-98

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor: Scott A. Morgan et al.

For: SPEECH COMMAND INPUT RECOGNITION SYSTEM FOR INTERACTIVE COMPUTER DISPLAY WITH SPEECH CONTROLLED DISPLAY OF RECOGNIZED COMMANDS

Enclosed are:

- ☒ Patent Specification and Declaration (2)
- ☒ 5 sheets of drawing(s).
- ☒ An assignment of the invention to International Business Machines Corporation (includes Recordation Form Cover Sheet).
- ☐ A certified copy of a ☐ application.
- ☐ Information Disclosure Statement.

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$ 760
Total Claims	9 - 20	0	x 18 =	\$ 0
Indep. Claims	3 - 3	0	x 78 =	\$ 0
MULTIPLE DEPENDENT CLAIM PRESENTED			x 260 =	\$ 0
TOTAL				\$ 760

☒ Please charge my Deposit Account No. 09-0447 in the amount of \$760.00. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account 09-0447. A duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR §1.16.

☒ Any patent application processing fees under 37 CFR §1.17.

Respectfully submitted,

By: 

Richard A. Henkler  
Registration No. 39,220  
Intellectual Property Law Dept.  
IBM Corporation  
11400 Burnet Road - 4054  
Austin, Texas 78758  
Telephone (512) 823-0962

U.S. PTO  
09/213846  
12/17/98

12/17/98

09213846-121798

**SPEECH COMMAND INPUT RECOGNITION SYSTEM FOR INTERACTIVE  
COMPUTER DISPLAY WITH SPEECH CONTROLLED DISPLAY OF  
RECOGNIZED COMMANDS**

Cross-Reference to Related Copending Patent Applications

5       The following patent applications, which are  
assigned to the assignee of the present invention and  
filed concurrently herewith, cover subject matter related  
to the subject matter of the present invention: "SPEECH  
COMMAND INPUT RECOGNITION SYSTEM FOR INTERACTIVE COMPUTER  
10   DISPLAY WITH MEANS FOR CONCURRENT AND MODELESS  
DISTINGUISHING BETWEEN SPEECH COMMANDS AND SPEECH QUERIES  
FOR LOCATING COMMANDS", Scott A. Morgan et al. (Attorney  
Docket No. AT9-98-344); "SPEECH COMMAND INPUT RECOGNITION  
SYSTEM FOR INTERACTIVE COMPUTER DISPLAY WITH TERM  
15   WEIGHTING MEANS USED IN INTERPRETING POTENTIAL COMMANDS  
FROM RELEVANT SPEECH TERMS", Scott A. Morgan et al.  
(Attorney Docket No. AT9-98-342); "SPEECH COMMAND INPUT  
RECOGNITION SYSTEM FOR INTERACTIVE COMPUTER DISPLAY WITH  
INTERPRETATION OF ANCILLARY RELEVANT SPEECH QUERY TERMS  
20   INTO COMMANDS", Scott A. Morgan et al. (Attorney Docket  
No. AT9-98-343); and "METHOD AND APPARATUS FOR PRESENTING  
PROXIMAL FEEDBACK IN VOICE COMMAND SYSTEMS", Alan R.  
Tannenbaum (Attorney Docket No. AT9-97-771).

Technical Field

25       The present invention relates to interactive  
computer controlled display systems with speech command  
input and more particularly to such systems which present  
display feedback to the interactive users.

09213846 "121793

Background of Related Art

The 1990's decade has been marked by a technological revolution driven by the convergence of the data processing industry with the consumer electronics industry. This advance has been even further accelerated by the extensive consumer and business involvement in the Internet over the past few years. As a result of these changes it seems as if virtually all aspects of human endeavor in the industrialized world require human/computer interfaces. There is a need to make computer directed activities accessible to people who, up to a few years ago, were computer illiterate or, at best, computer indifferent.

Thus, there is continuing demand for interfaces to computers and networks which improve the ease of use for the interactive user to access functions and data from the computer. With desktop-like interfaces including windows and icons, as well as three-dimensional virtual reality simulating interfaces, the computer industry has been working hard to fulfill such interface needs by making interfaces more user friendly by making the human/computer interfaces closer and closer to real world interfaces, e.g. human/human interfaces. In such an environment it would be expected that speaking to the computer in natural language would be a very natural way of interfacing with the computer for even novice users. Despite the potential advantages of speech recognition computer interfaces, this technology has been relatively slow in gaining extensive user acceptance.

Speech recognition technology has been available for over twenty years but it has only been recently that it is beginning to find commercial acceptance, particularly with speech dictation or "speech to text" systems, such

as those marketed by International Business Machines Corporation (IBM) and Kurzweil Corporation. That aspect of the technology is now expected to have accelerated development until it will have a substantial niche in the word processing market. On the other hand, a more universal application of speech recognition input to computers, which is still behind expectations in user acceptance, is in command and control technology wherein, for example, a user may navigate through a computer system's graphical user interface (GUI) by the user speaking the commands which are customarily found in the systems menu text, icons, labels, buttons, etc.

Many of the deficiencies in speech recognition, both in word processing and in command technologies, are due to inherent voice recognition errors due in part to the status of the technology and in part to the variability of user speech patterns and the user's ability to remember the specific commands necessary to initiate actions. As a result, most current voice recognition systems provide some form of visual feedback which permits the user to confirm that the computer understands his speech utterances. In word processing, such visual feedback is inherent in this process since the purpose of the process is to translate from the spoken to the visual. That may be one of the reasons that the word processing applications of speech recognition have progressed at a faster pace. In any event, in all voice recognition systems with visual feedback, at some stage, the interactive user is required to make some manual input, e.g. through a mouse or a keyboard. The need for such manual operations still gets in the way of interactive users who, because of a lack of computer skills or other reasons, wish to relate to the computer

system in a fully voice activated or conversational manner.

#### Summary of the Present Invention

09213346 "121798  
The present invention provides a solution for users  
5 of voice recognition systems who still need visual  
feedback in order to confirm the accuracy of spoken  
commands but need to operate in a "hands-off" mode with  
respect to computer input. In an interactive computer  
controlled display system with speech command input  
10 recognition, the present invention provides a system for  
confirming the recognition of a command by first  
predetermining a plurality of speech commands for  
respectively designating each of a corresponding  
plurality of system actions and providing means for  
15 detecting such speech commands. There also are means  
responsive to a detected speech command for displaying  
said command for a predetermined time period, during  
which time the user may give a spoken command to stop the  
system action designated by said displayed command. In  
20 the event that said system action is not stopped during  
said predetermined time period, the system action  
designated by said displayed command will be executed.  
The user need not wait for the expiration of the time  
period if he notes that the displayed command is the  
25 right one, he has speech command means for executing the  
system action designated by said displayed command prior  
to the expiration of said time period. This may be as  
simple as just repeating the displayed command.

#### Brief Description of the Drawings

30 The present invention will be better understood and  
its numerous objects and advantages will become more

apparent to those skilled in the art by reference to the following drawings, in conjunction with the accompanying specification, in which:

Fig. 1 is a block diagram of a generalized data  
5 processing system including a central processing unit which provides the computer controlled interactive display system with voice input used in practicing the present invention;

Fig. 2 is a diagrammatic view of a display screen on  
10 which an interactive dialog panel interface used for visual feedback when a speech command input has been made;

Fig. 3 is the display screen view of Fig. 2 after a speech command input has been made and part of the time  
15 period for retracting the command has expired;

Fig. 4 is the display screen view of Fig. 3 after a further part of the time period for retracting the command has expired;

Fig. 5 is the display screen view of Fig. 4 after  
20 the time period for retracting the command has almost expired;

Fig. 6 is a flowchart of the basic elements of the system and program in a computer controlled display with visual feedback system of the present invention for  
25 enabling the spoken retraction of spoken commands; and

Fig. 7 is a flowchart of the steps involved in running the program set up in Fig. 6.

#### Detailed Description of the Preferred Embodiment

Referring to Fig. 1, a typical data processing  
30 system is shown which may function as the computer controlled display terminal used in implementing the system of the present invention by receiving and

09213846-121798

interpreting speech input and providing a displayed feedback of spoken commands and a time period wherein a user may orally stop a command.

5 A central processing unit (CPU) 10, such as any PC microprocessor in a PC available from IBM or Dell Corp., is provided and interconnected to various other components by system bus 12. An operating system 41 runs on CPU 10, provides control and is used to coordinate the function of the various components of Fig. 1. Operating  
10 system 41 may be one of the commercially available operating systems, such as the OS/2<sup>(TM)</sup> operating system available from IBM (OS/2 is a trademark of International Business Machines Corporation); Microsoft's Windows 95<sup>(TM)</sup> or Windows NT<sup>(TM)</sup>, as well as the UNIX or AIX operating  
15 systems. A speech recognition program with visual feedback of spoken commands, so that the user may speak retractions during set time periods, application 40, to be subsequently described in detail, runs in conjunction with operating system 41 and provides output calls to the  
20 operating system 41, which implements the various functions to be performed by the application 40.

A read only memory (ROM) 16 is connected to CPU 10 via bus 12 and includes the basic input/output system (BIOS) that controls the basic computer functions.  
25 Random access memory (RAM) 14, I/O adapter 18 and communications adapter 34 are also interconnected to system bus 12. It should be noted that software components, including operating system 41 and application 40, are loaded into RAM 14, which is the computer  
30 system's main memory. I/O adapter 18 may be a small computer system interface (SCSI) adapter that communicates with the disk storage device 20, i.e. a hard drive. Communications adapter 34 interconnects bus 12

09213846-121798

with an outside network enabling the data processing system to communicate with other such systems over a local area network (LAN) or wide area network (WAN), which includes, of course, the Internet. I/O devices are also connected to system bus 12 via user interface adapter 22 and display adapter 36. Keyboard 24 and mouse 26 are all interconnected to bus 12 through user interface adapter 22. Manual I/O devices, such as the keyboard and the mouse, are shown primarily because they may be used for ancillary I/O functions not related to the present invention, which uses primarily spoken commands. Audio output is provided by speaker 28 and the speech input which is made through input device 27, which is diagrammatically depicted as a microphone, which accesses the system through an appropriate interface adapter 22. The speech input and recognition will be subsequently described in greater detail, particularly with respect to Fig. 2. Display adapter 36 includes a frame buffer 39, which is a storage device that holds a representation of each pixel on the display screen 38. Images, such as speech input commands, relevant proposed commands, as well as speech input terminology display feedback panels, may be stored in frame buffer 39 for display on monitor 38 through various components, such as a digital to analog converter (not shown) and the like. By using the aforementioned I/O devices, a user is capable of inputting visual information to the system through the keyboard 24 or mouse 26 in addition to speech input through microphone 27 and receiving output information from the system via display 38 or speaker 28.

Voice or speech input is applied through microphone 27 which represents a speech input device. Since the art of speech terminology and speech command recognition is

09213346-12133



an old and well developed one, we will not go into the hardware and system details of a typical system which may be used to implement the present invention. It should be clear to those skilled in the art that the systems and hardware in any of the following patents may be used:

5 US5,671,328; US5,133,111; US5,222,146; US5,664,061; US5,553,121; and US5,157,384. The speech input to the system could be actual commands, which the system will recognize, and/or speech terminology, which the user addresses to the computer so that the computer may propose appropriate relevant commands through feedback. The input speech goes through a recognition process which seeks a comparison to a stored set of commands. If a command is identified, the actual command will be

10 displayed first and subsequently carried out after a set time period during which the command may be vocally retracted.

Now with respect to Figs. 2 through 5 we will provide an illustrative example of how the present invention may be used to provide the visual feedback of displayed commands, as well as the prompts for retracting commands. When the screen image panels are described, it will be understood that these may be rendered by storing image and text creation programs, such as those in any conventional window operating system in the RAM 14 of the system of Fig. 1. The display screens of Figs. 2 through 7 are presented to the viewer on display monitor 38 of Fig. 1. In accordance with conventional techniques, the user may control the screen interactively through a

20 conventional I/O device, such as mouse 26, Fig. 1, and speech input is applied through microphone 27. These operate through user interface 22 to call upon programs in RAM 14 cooperating with the operating system 41 to

25

30

09213346-121753

create the images in frame buffer 39 of display adapter 36 to control the display panels on monitor 38.

The initial display screen of Fig. 2 shows a display screen with visual feedback display panel 70. In the panel, window 71 will show the words that the user speaks; these words may contain commands or may bring forth associated relevant commands; window 72 will display all of the commands. At this point, window 72 is still at a prompt stage suggesting to the user commands which he may wish to use. The user may issue one of these commands by speaking it or he may speak another command. Either way, the result will be the display of the panel of Fig. 3 with the issued command, which, in the present example, is one of the suggested commands, "Paste" being highlighted 75. This commences the run of the time period, as signified by timer icon 76, during which the execution of the selected command is delayed, and the user may stop or retract the command by saying "NO" or a like command for stopping the execution. Figs. 4 and 5 are the panel of Fig. 3 showing the advance of the time period toward expiration as indicated by timer icon becoming filled up. It should be noted that if the user becomes certain that he has the right command before the time period has expired, he need not wait for the command execution; he may vocally confirm his selection by issuing an appropriate command and have the selected command executed immediately. The system may conveniently be set up so that all he has to do is repeat his selected command, e.g. "Paste", and the command will be executed immediately.

Now with reference to Figs. 6 and 7 we will describe a process implemented by the present invention in conjunction with the flowcharts of these figures. Fig. 6

09213346-121753

is a flowchart showing the development of a process according to the present invention for providing visual feedback to spoken commands so that the user has a time period or time delay in the command execution within  
5 which he may vocally confirm or cancel the command. First, step 80, a set of recognizable spoken commands, which will drive the system being used, is set up and stored. Then there are set up appropriate processes to carry out the action called for by each recognized speech  
10 command, step 81. A process for displaying recognized speech commands is also set up, step 82. A timer process for delaying the execution of the selected displayed command for a predetermined period is set up, step 83. A command is set up or enabled which may be spoken during  
15 the delay period to stop the execution of the selected command, step 84. A process is set for stopping the execution of the selected command responsive to the issuance of a stop command, step 85. Also, a process is set up whereby the user may issue a command to confirm  
20 the selected command during the time delay period, whereupon the selected command will immediately be executed, step 86.

With this set up, the running of the process will now be described with respect to Fig. 7. First, step 90,  
25 a determination is made as to whether there has been a command recognized by the system. If No, the process is returned to step 90 where such a command is awaited. If Yes, then the command is displayed, step 91, so that the user now has an opportunity to confirm the command during  
30 a period of time where the execution is delayed. This delay is timed by starting a timer, step 92, after which, decision step 93, a determination is made as to whether the time period of delay is over. If No, a further

determination is made as to whether a stop command has been issued as yet, decision step 94. If Yes, the execution of the selected command is cancelled, step 95, and the process is branched via branch "B" to step 98 where a decision is made as to whether the session is over, in a manner to subsequently described. If the decision from step 94 is No, then the process proceeds to step 96 where a determination is made as to whether the user has spoken a confirmation of the selected command. If No, then the process returns to step 93 where the end of the time delay period is awaited. If the decision from step 96 is Yes, i.e. the user has spoken a confirmation of the selected command, or if the decision from step 93 is Yes, i.e. the time period of delay is over, then the process goes to step 97 and the selected command is executed. Then, step 98, a determination is made as to whether the session is over. If Yes, the session is exited. If No, the process is returned to step 90 where the next command is awaited.

One of the preferred implementations of the present invention is as an application program 40 made up of programming steps or instructions resident in RAM 14, Fig. 1, during computer operations. Until required by the computer system, the program instructions may be stored in another readable medium, e.g. in disk drive 20, or in a removable memory such as an optical disk for use in a CD ROM computer input, or in a floppy disk for use in a floppy disk drive computer input. Further, the program instructions may be stored in the memory of another computer prior to use in the system of the present invention and transmitted over a LAN or a WAN, such as the Internet, when required by the user of the present invention. One skilled in the art should

appreciate that the processes controlling the present invention are capable of being distributed in the form of computer readable media of a variety of forms.

Although certain preferred embodiments have been  
5 shown and described, it will be understood that many changes and modifications may be made therein without departing from the scope and intent of the appended claims.

09213346-124793

Claims

- 1 1. In an interactive computer controlled display system  
2 with speech command input recognition, apparatus for  
3 confirming the recognition of a command comprising:  
4 means for predetermining a plurality of speech  
5 commands for respectively designating each of a  
6 corresponding plurality of system actions,  
7 means for detecting said speech commands,  
8 means responsive to a detected speech command for  
9 displaying said command for a predetermined time period,  
10 speech command means for stopping the system action  
11 designated by said displayed command, and  
12 means for executing the system action designated by  
13 said displayed command in the event that said system  
14 action is not stopped during said predetermined time  
15 period.
- 1 2. The system of claim 1 further including speech  
2 command means for executing the system action designated  
3 by said displayed command prior to the expiration of said  
4 time period.
- 1 3. The system of claim 2 wherein said speech command  
2 means for executing said system action prior to said time  
3 period expiration is responsive to a repetition of the  
4 detected speech command.
- 1 4. A method for confirming speech command input to an  
2 interactive computer controlled display system with  
3 speech command input recognition comprising:

09213346-121793

4       predetermining a plurality of speech commands for  
5       respectively designating each of a corresponding  
6       plurality of system actions,  
7       detecting said speech commands,  
8       responsive to a detected speech command, displaying  
9       said command for a predetermined time period,  
10       enabling a speech command for stopping the system  
11       action designated by said displayed command, and  
12       executing the system action designated by said  
13       displayed command in the event that said system action is  
14       not stopped by said enabled speech command during said  
15       predetermined time period.

1       5. The method of claim 4 further including an enabled  
2       speech command for executing the system action designated  
3       by said displayed command prior to the expiration of said  
4       time period.

1       6. The method of claim 5 wherein said speech command for  
2       executing said system action prior to said time period  
3       expiration is a repetition of the detected speech  
4       command.

1       7. A computer program having program code included on a  
2       computer readable medium for confirming speech command  
3       input recognition in an interactive computer controlled  
4       display system comprising:  
5       means for predetermining a plurality of speech  
6       commands for respectively designating each of a  
7       corresponding plurality of system actions,  
8       means for detecting said speech commands,  
9       means responsive to a detected speech command for  
10       displaying said command for a predetermined time period,

09213846-121798

11 speech command means for stopping the system action  
12 designated by said displayed command, and  
13 means for executing the system action designated by  
14 said displayed command in the event that said system  
15 action is not stopped during said predetermined time  
16 period.

1 8. The computer program of claim 7 further including  
2 speech command means for executing the system action  
3 designated by said displayed command prior to the  
4 expiration of said time period.

1 9. The computer program of claim 2 wherein said speech  
2 command means for executing said system action prior to  
3 said time period expiration is responsive to a repetition  
4 of the detected speech command.

09243346-131798



SPEECH COMMAND INPUT RECOGNITION SYSTEM FOR INTERACTIVE  
COMPUTER DISPLAY WITH SPEECH CONTROLLED DISPLAY OF  
RECOGNIZED COMMANDS

Abstract

5       The present invention provides a solution for users  
of voice recognition systems who still need visual  
feedback in order to confirm the accuracy of spoken  
commands but need to operate in a "hands-off" mode with  
respect to computer input. In an interactive computer  
10 controlled display system with speech command input  
recognition, the present invention provides a system for  
confirming the recognition of a command by first  
predetermining a plurality of speech commands for  
respectively designating each of a corresponding  
15 plurality of system actions and providing means for  
detecting such speech commands. There also are means  
responsive to a detected speech command for displaying  
said command for a predetermined time period, during  
which time the user may give a spoken command to stop the  
20 system action designated by said displayed command. In  
the event that said system action is not stopped during  
said predetermined time period, the system action  
designated by said displayed command will be executed.  
The user need not wait for the expiration of the time  
25 period if he notes that the displayed command is the  
right one; he has speech command means for executing the  
system action designated by said displayed command prior  
to the expiration of said time period. This may be as  
simple as just repeating the displayed command.

09213346-121798

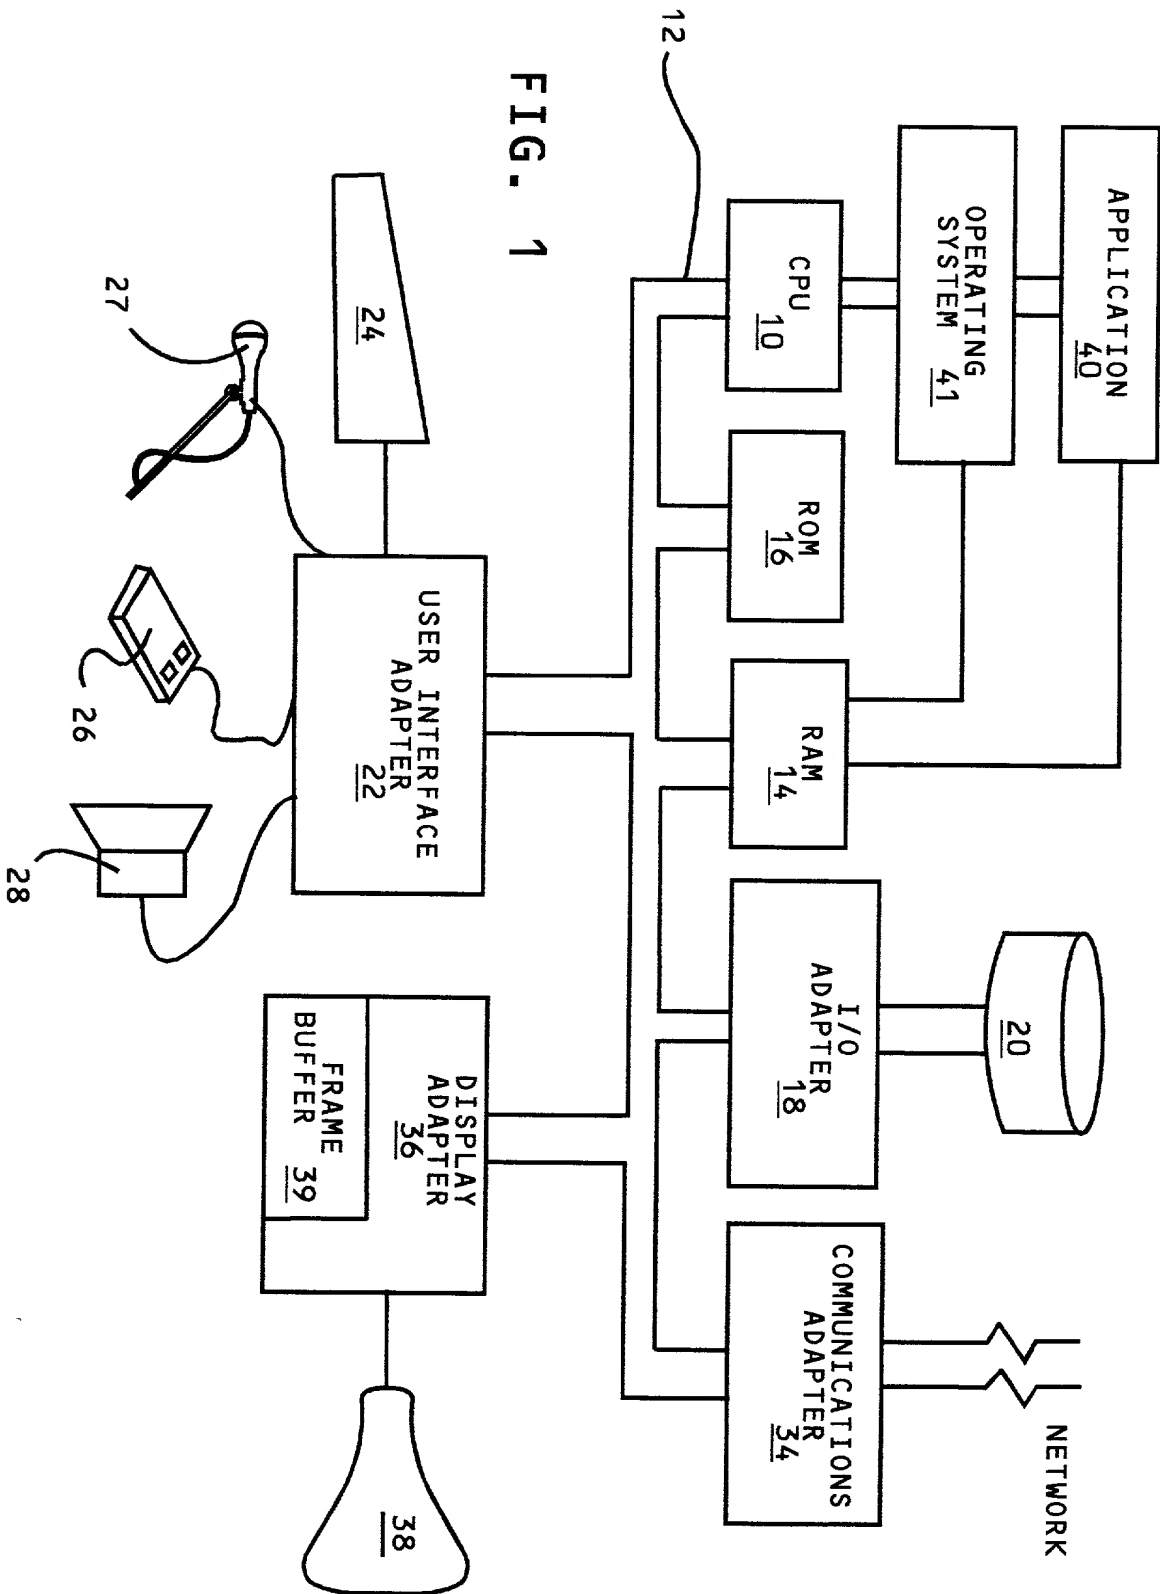


FIG. 1

FIG. 2

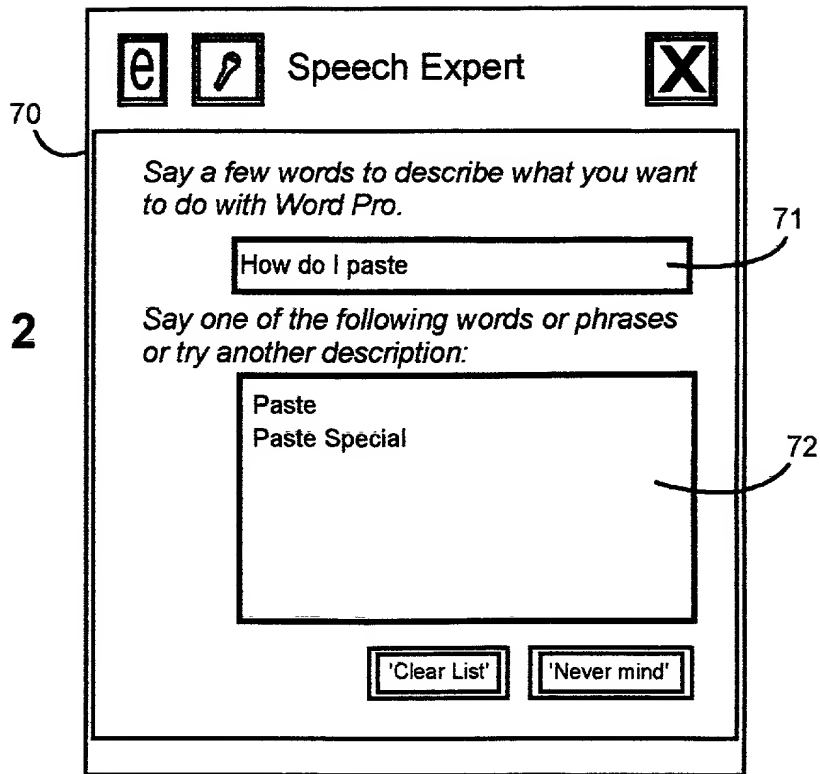
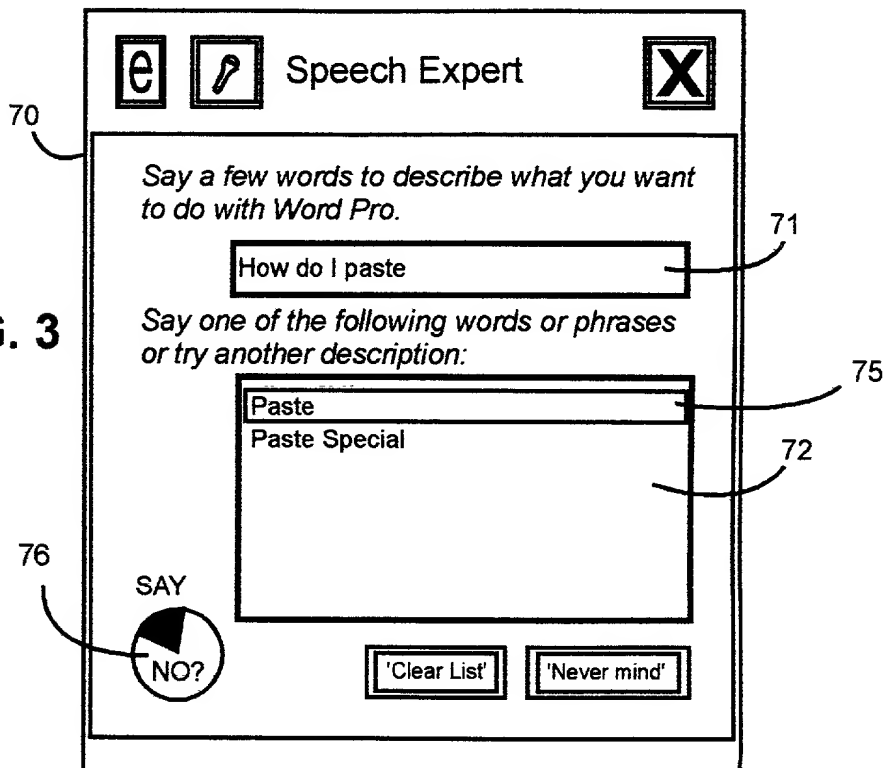


FIG. 3



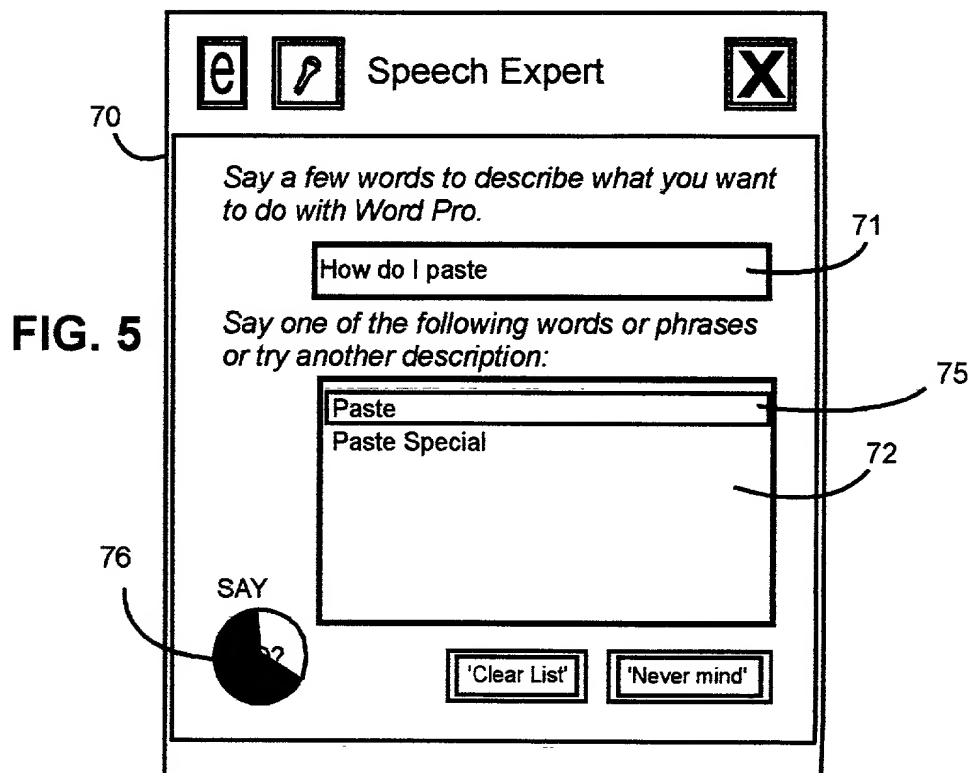
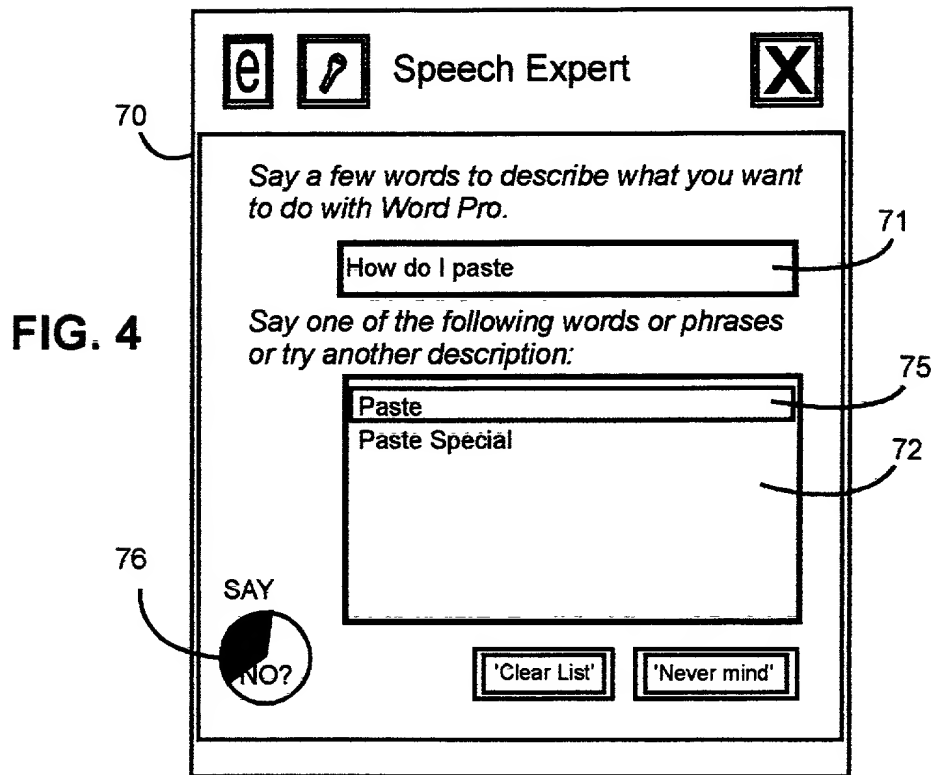


FIG. 6


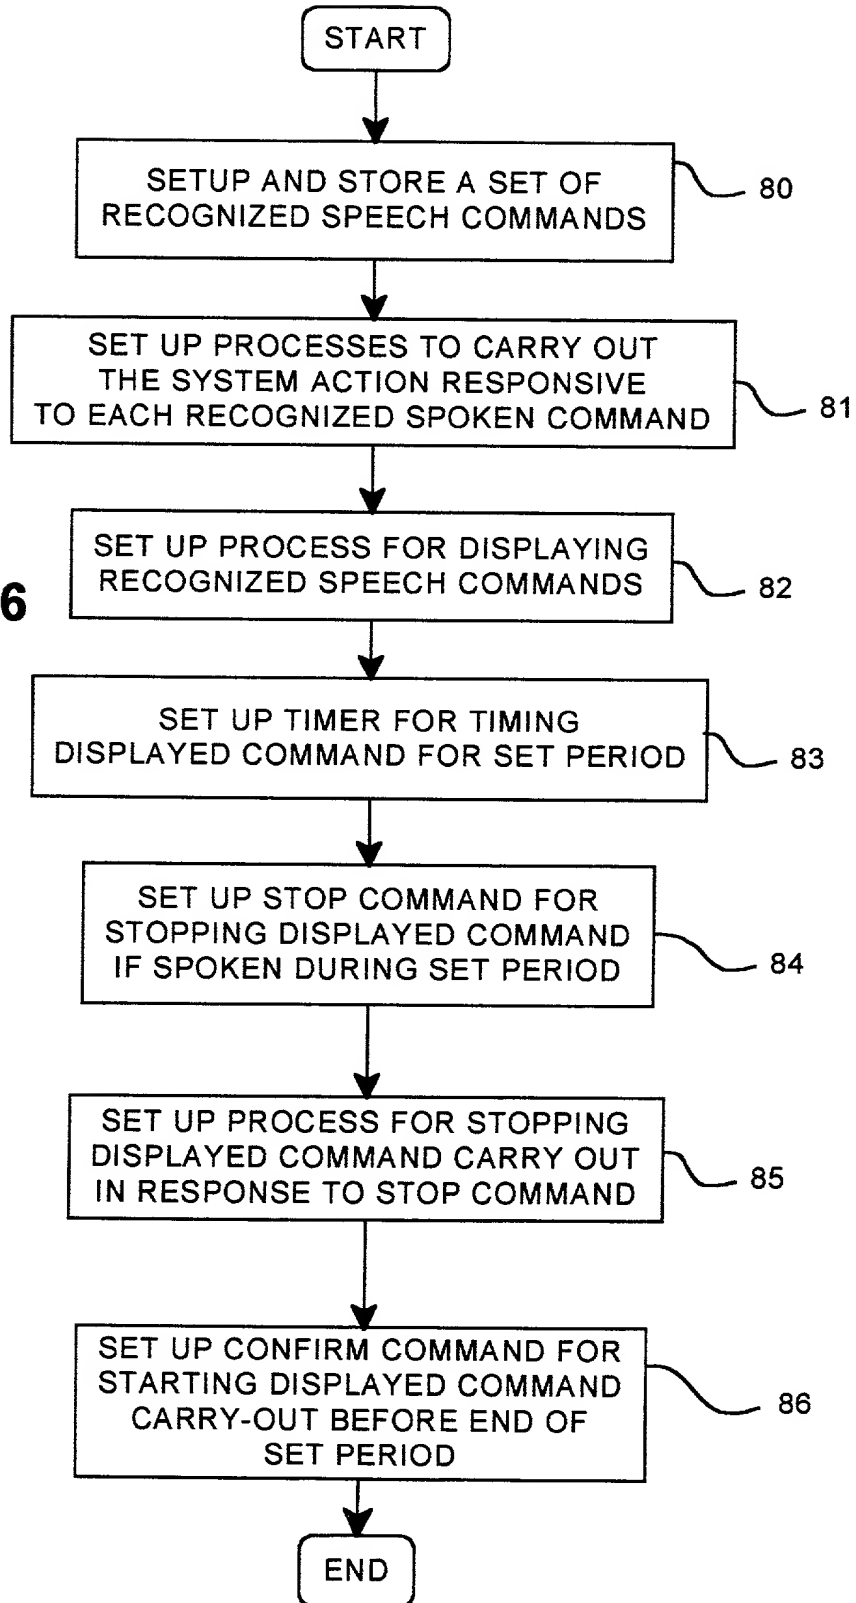


FIG. 7

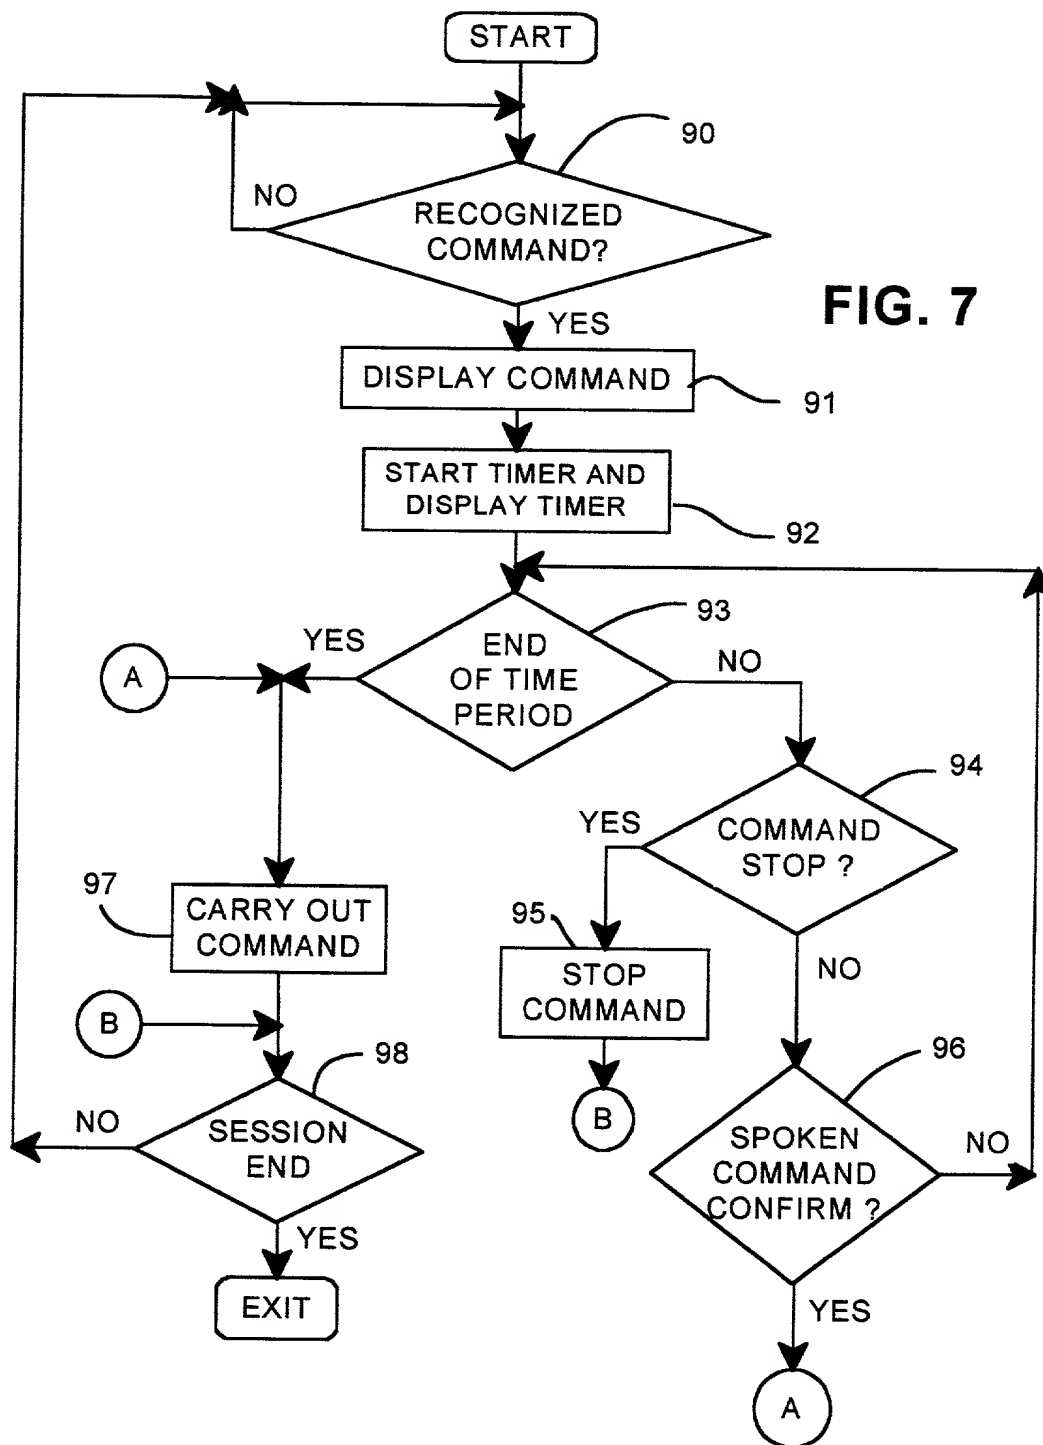

**DECLARATION AND POWER OF ATTORNEY FOR  
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SPEECH COMMAND INPUT RECOGNITION SYSTEM FOR INTERACTIVE COMPUTER DISPLAY WITH  
SPEECH CONTROLLED DISPLAY OF RECOGNIZED COMMANDS

the specification of which (check one)

X is attached hereto.

— was filed on \_\_\_\_\_  
as Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

\_\_\_\_ Yes \_\_\_\_ No  
\_\_\_\_ (Number) \_\_\_\_ (Country) \_\_\_\_ (Day/Month/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior

09213345-121793

application and the national or PCT international filing date of this application:

(Application Serial #)	(Filing Date)	(Status)
------------------------	---------------	----------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; Robert M. Carwell, Reg. No. 28,499; Jeffrey S. LaBaw, Reg. No. 31,633; Douglas H. Lefevre, Reg. No. 26,193; Casimer K. Salys, Reg. No. 28,900; David A. Mims, Reg. No. 32,708; Richard A. Henkler, Reg. No. 39,220; Volel Emile, Reg. No. 39,969; James H. Barksdale, Jr. Reg. No. 24,091; Anthony V. England, Reg. No. 35,129; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Leslie A. Van Leeuwen, Reg. No. 42,196; Marilyn S. Dawkins, Reg. No. 31,140; and J. B. Kraft, Reg. No. 19,226.

Send correspondence to: Richard A. Henkler, International Business Machines Corporation, Intellectual Property Law Department, Internal Zip 4054, 11400 Burnet Road, Austin, Texas 78758 and direct all telephone calls to Richard A. Henkler, (512) 823-0962.

FULL NAME OF SOLE OR FIRST INVENTOR: Scott Anthony Morgan

INVENTORS SIGNATURE: *Scott Anthony Morgan* DATE: 12/16/98

RESIDENCE: 3609 Kentfield Road  
Austin, Texas 78759

CITIZENSHIP: United States

POST OFFICE ADDRESS: 3609 Kentfield Road  
Austin, Texas 78759



DOCKET NUMBER: AT9-98-341

FULL NAME OF SECOND INVENTOR: David John Roberts

INVENTORS SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

RESIDENCE: Sycamore Lodge, Church Street  
Stockton, Warwickshire  
United Kingdom CV23 8JG

CITIZENSHIP: United Kingdom

POST OFFICE ADDRESS: Sycamore Lodge, Church Street  
Stockton, Warwickshire  
United Kingdom CV23 8JG

FULL NAME OF THIRD INVENTOR: Craig Ardner Swearingen

INVENTORS SIGNATURE: Craig Ardner Swearingen DATE: 12/16/98

RESIDENCE: 8905 Martha's Drive  
Austin, Texas 78717

CITIZENSHIP: United States

POST OFFICE ADDRESS: 8905 Martha's Drive  
Austin, Texas 78717

FULL NAME OF FOURTH INVENTOR: Alan Richard Tannenbaum

INVENTORS SIGNATURE: Alan Richard Tannenbaum DATE: 12/16/98

RESIDENCE: 3801 Greystone Drive  
Austin, Texas 78731

CITIZENSHIP: United States

POST OFFICE ADDRESS: 3801 Greystone Drive  
Austin, Texas 78731